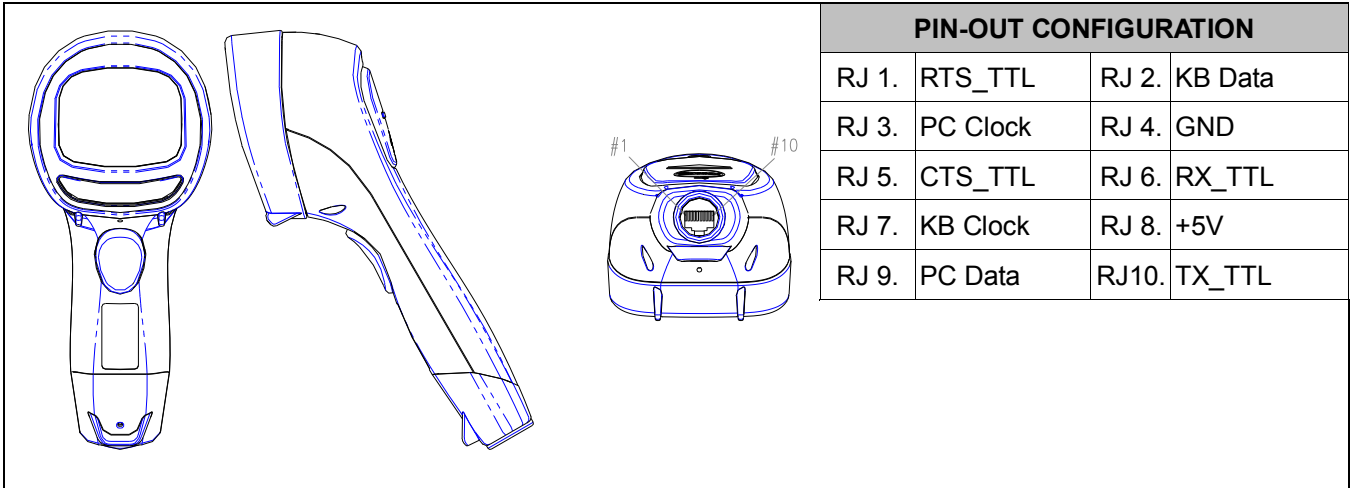


[Buyer's Guide]

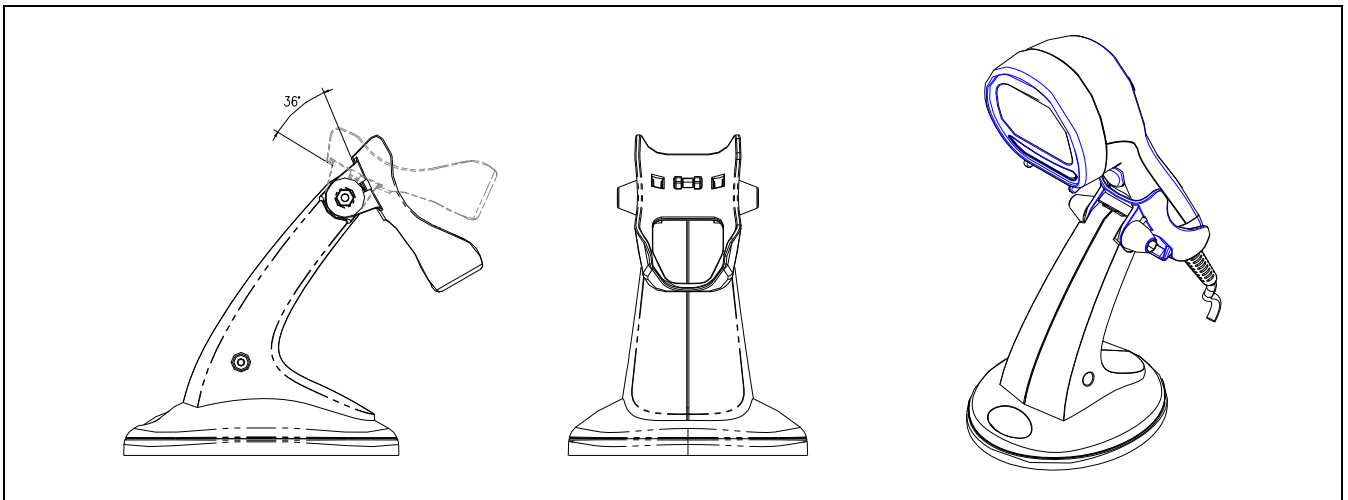
Z-3060 Handheld Omnidirectional Laser Scanner

Standard Device



PIN-OUT CONFIGURATION			
RJ 1.	RTS_TTL	RJ 2.	KB Data
RJ 3.	PC Clock	RJ 4.	GND
RJ 5.	CTS_TTL	RJ 6.	RX_TTL
RJ 7.	KB Clock	RJ 8.	+5V
RJ 9.	PC Data	RJ10.	TX_TTL



















Standard Accessory



Description	Stand for Z-3060	
Barcode	P/N	REMARK
	883-60HL00-000	White Housing
	883-60HL00-001	Black Housing
	883-60HL00-0NB	White Housing w/o ZEBEX logo
	883-60HL00-0N1	Black Housing w/o ZEBEX logo

[Buyer's Guide]

Ordering Information (Stand included for standard package)

Barcode	P/N	Model Name	Remark
	883-600000-000	Z-3060	White Housing (Device Only w/o Stand)
	883-600000-001	Z-3060 (B)	Black Housing (Device Only w/o Stand)
	883-6000KP-000	Z-3060 (K)	White Housing w/PS/2 Cable
	883-6000KP-001	Z-3060 (K)(B)	Black Housing w/PS/2 Cable
	883-6000R9-000	Z-3060 (R)	White Housing w/RS-232 Cable (DCE pin-out)
	883-6000R9-001	Z-3060 (R)(B)	Black Housing w/RS-232 Cable (DCE pin-out)
	883-6000RP-000	Z-3060 (R)	White Housing w/RS-232 Cable (DCE pin-out)
	883-6000RP-001	Z-3060 (R)(B)	Black Housing w/RS-232 Cable (DCE pin-out)
	883-6000UB-000	Z-3060 (U)	White Housing w/USB Cable
	883-6000UB-001	Z-3060 (U)(B)	Black Housing w/USB Cable
	883-600000-0NB	Z-3060	White Housing w/o Logo (Device Only w/o Stand)
	883-600000-0N1	Z-3060 (B)	Black Housing w/o Logo (Device Only w/o Stand)
	883-6000KP-0NB	Z-3060 (K)	White Housing w/PS/2 Cable w/o Logo
	883-6000KP-0N1	Z-3060 (K)(B)	Black Housing w/PS/2 Cable w/o Logo
	883-6000RP-0NB	Z-3060 (R)	White Housing w/RS-232 Cable (DCE pin-out) w/o Logo
	883-6000RP-0N1	Z-3060 (R)(B)	Black Housing w/RS-232 Cable (DCE pin-out) w/o Logo
	883-6000UB-0NB	Z-3060 (U)	White Housing w/USB Cable w/o Logo
	883-6000UB-0N1	Z-3060 (U)(B)	Black Housing w/USB Cable w/o Logo

[Buyer's Guide]

Standard Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include PS/2, RS-232 (either DCE or DTE pinout), USB, virtual COM, OPOS, and etc.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

1. Keyboard Wedge Cable (for PS/2)

PIN-OUT CONFIGURATION	
MINI DIN (M)	MINI DIN(F)
1. PC Data	1. KB Data
2. N.C.	2. N.C.
3. GND	3. GND
4. +5V	4. +5V
5. PC Clock	5. KB Clock
6. N.C.	6. N.C.

Item Part No. 171-10K100-200

2. RS-232C Communication Cable (DTE pin out)

PIN-OUT CONFIGURATION	
DB-9 (F)	FUNCTION
2	TX
3	RX
7	CTS
8	RTS
5	GND
9	+5V Input

Item Part No. 171-10R445-200

RS-232C Communication Cable (DCE pin out)

PIN-OUT CONFIGURATION	
DB-9 (F)	FUNCTION
2	RX
3	TX
7	RTS
8	CTS
5	GND
9	+5V Input

Item Part No. 171-10R435-200

3. USB Interface

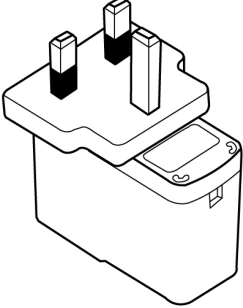
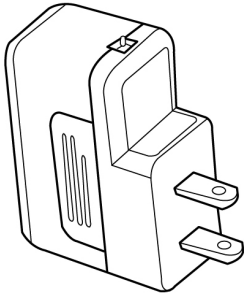
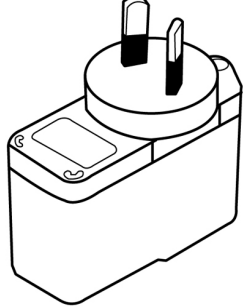
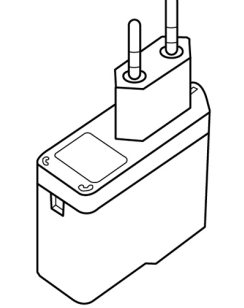
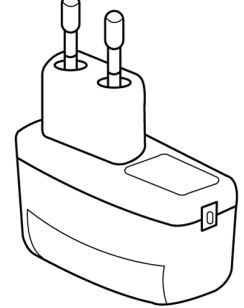
PIN-OUT CONFIGURATION	
USB TYPE A CONNECTOR	FUNCTION
1.	VCC
2.	D-
3.	D+
4.	VSS

HID USB only	Item Part No.	171-10U305-200
Virtual COM USB	Item Part No.	171-10U300-200
HID / OPOS USB	Item Part No.	171-10U325-200

- * HID USB, virtual COM USB and OPOS USB interface are of the same pin-out but different part number.
- * Additional software and special firmware may be required for activating virtual COM or OPOS USB interface.

Power Adapter

Z-3060 requires a minimum of 200mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug
				

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.