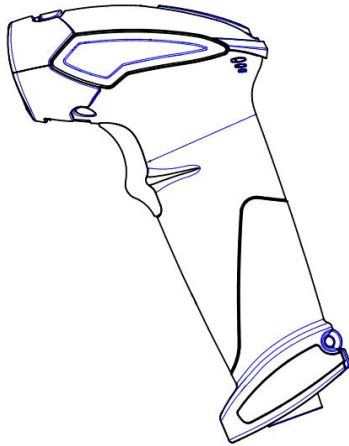


Z-3192 Series Gun Type Handheld 2D Image Reader

Standard Device



PIN-OUT CONFIGURATION

RJ 1.	RTS	RJ 2.	USB+
RJ 3.	USB-	RJ 4.	GND
RJ 5.	CTS	RJ 6.	RXD
RJ 7.	USB_ENABLE	RJ 8.	+5V
RJ 9.	NC	RJ 10.	TXD

Z-3192SR (Standard Version)

Barcode	P/N	Model Name	Remark
	88H-92SRRP-000	Z-3192SR (R)	White housing w/RS232 cable (DTE pin-out)
	88H-92SRRP-001	Z-3192SR (R) (B)	Black housing w/RS232 cable (DTE pin-out)
	88H-92SRUB-000	Z-3192SR (U)	White housing w/USB cable
	88H-92SRUB-001	Z-3192SR (U) (B)	Black housing w/USB cable

Z-3192HD (High Density Version)

Barcode	P/N	Model Name	Remark
	88H-92HDRP-000	Z-3192HD (R)	White housing w/RS232 cable (DTE pin-out)
	88H-92HDRP-001	Z-3192HD (R) (B)	Black housing w/RS232 cable (DTE pin-out)
	88H-92HDUB-000	Z-3192HD (U)	White housing w/USB cable
	88H-92HDUB-001	Z-3192HD (U) (B)	Black housing w/USB cable

[Buyer's Guide]

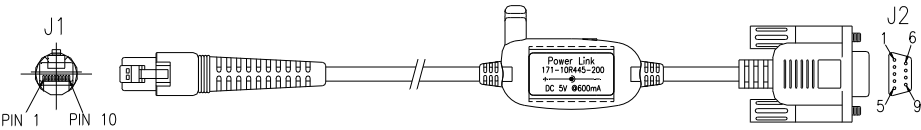

Optional Accessory

	Description		Stand for Z-319X Series	
	Barcode	P/N	Remark	
		88H-90ST00-000	White Housing	
		88H-90ST00-001	Black Housing	
		88H-90ST00-0NB	White Housing w/o ZEBEX logo	
	88H-90ST00-0N1	Black Housing w/o ZEBEX logo		

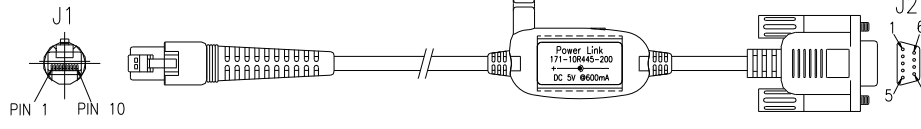

Standard Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include RS-232 and USB.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.



1. RS-232C Communication Cable (DTE pin out)

	DB-9 (F)	FUNCTION
	2	TX
	3	RX
	7	CTS
	8	RTS
	5	GND
9	+5V Input	
Item Part No.	171-10R445-200	

2. RS-232C Communication Cable (DCE pin out)

	DB-9 (F)	FUNCTION
	2	RX
	3	TX
	7	RTS
	8	CTS
	5	GND
9	+5V Input	
Item Part No.	171-10R435-200	






3. USB Cable

	USB TYPE A CONNECTOR	FUNCTION
	1.	VCC
	2.	D-
	3.	D+
	4.	VSS
Item Part No.	171-14U305-200	

[Buyer's Guide]

Power Adapter

Z-3192 requires a minimum of 250mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug
				

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.